



GUANGDONG BOSHUN BELTING CO.,LTD.

博力顺
BO LI SHUN

Product Data Sheet

Type: 30P25-15A

Main industry segments

-

Applications

-

Color code

RAL 6029

Product structure

Top cover

-Thickness	1.2 mm
-Material	Polyvinyl chloride (PVC)
-Features	Smooth
-Color	Green
-Surface	Smooth
-Hardness	80° ShoreA

Bottom cover

-Thickness	0.5 mm
-Material	Polyester monofilament
-Features	Lateral stability, Light construction, Antistatic
-Color	-
-Surface	Rigid fabric
-Hardness	-

Technical data

Total thickness	3.0 mm
Number of plies	2
Weight	3.6 kg/m ²
Maximum width	3500 mm
Effective pull at 1% elongation	8 N/mm
Twisting force	12.8 N/mm
Maximum admissible tension	15 N/mm
Breaking strength	150 N/mm
Temperature range	-15 °C ~ +80 °C



Minimum roll diameter

Normal flexion	50 mm
Counter flexion	80 mm

Characteristic

Slide	Yes	Flame retardant	No
Roller	Yes	Cold resistant	No
Trough	No	Knife edges	No
Antistatic	No	Curves	No
Oil and fat resistant	No	Guides	Yes
FDA	No	Cleats	Yes
Low noise	No	Sidewalls	Yes

Product photos

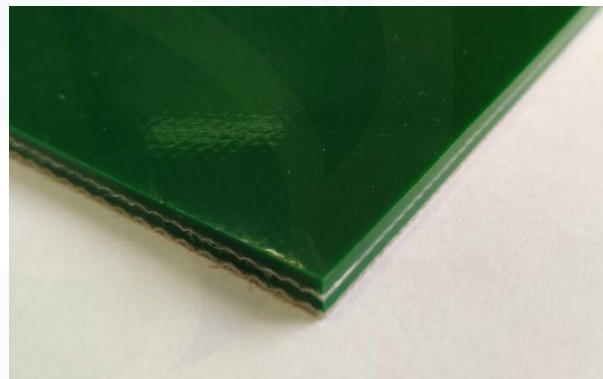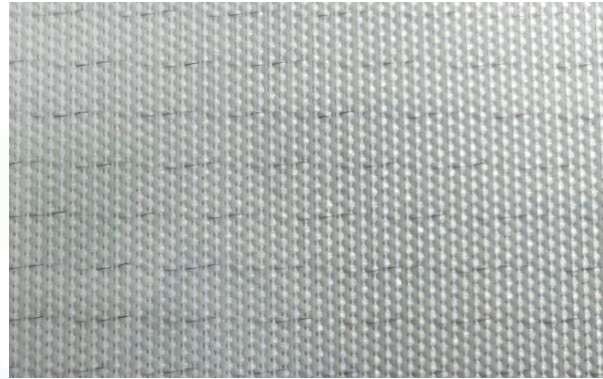

Joining methods

Double finger

Disclaimer

All data are approximate values and defined under the following standard climatic conditions. 23 °C, 50 % relative humidity (ISO 554).

All informations are recommendations and believed to be reliable, but no representations, guarantees, or warranties of any kind are made as to their accuracy or suitability for particular applications. Due to the fact that Boshun Belting has no control of use, we will not assume any liability concerning the suitability and process ability of the products mentioned herein. This also applies to defects, damages, consequential damages, and other consequences

Issued: 2018.12.28

Last update: 2018.12.29

www.boshunbelting.com

info@boshunbelting.com